

## WX 3200



Powermate portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works. A complete range to choose from, for best solution to your remote power needs. When not fixing up around the job site, your Powermate portable generator can be used for emergency power during a power outage.

### FEATURES

- Powermate OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Engine oil for the first startup supplied in a bottle
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track gasoline levels
- Practical quick user's Starting Instruction (decals)
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



### Desempenho

Frequência	Hz	50
Tensão	V	230
Nº de fases		1
Potência Máxima	Watts	2950
Potência Contínua	Watts	2450



**Motor**

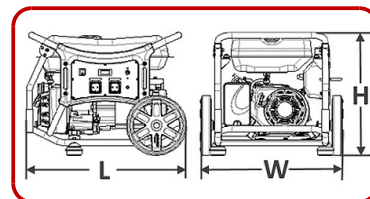
Marco		Powermate
Tipo		OHV
Velocidade Nominal de Operação	rpm	3000
Combustível		Gasolina
Sistema de Arranque		Recoil
Capacidade de Óleo	l	0.6
Óleo de Guarda		√

**Alternador**

Sistema de regulação de Tensão		AVR
--------------------------------	--	-----

**Dados dimensionais**

Comprimento	(L) mm	680
Largura	(W) mm	602
Altura	(H) mm	523
Peso Seco	Kg	49
Dimensão da Caixa CxLxA	mm	685x505x520

**Autonomia**

Capacidade do Tanque de Combustível		17
Consumo de Combustível @ 75%	l/h	1.29
Tempo de Operação @ 75%	h	13.1

**Nível de Ruído**

Nível de Ruído Garantido (PTN)	dB(A)	93
Noise pressure level @ 7 mt	dB(A)	65

**PAINEIS DE CONTROLE DO GRUPO GERADOR**

Montado no grupo gerador e completa com: instrumentação, controle, proteção do grupo gerador e tomadas.

**COMANDOS:**

- Selector OFF - ON
- Arranque manual

**INSTRUMENTAÇÃO**

- Voltímetro
- Conta-horas
- Frequencímetro
- Estado combustível

**PROTEÇÕES**

- Disjuntor Térmico
- Oleo

**TOMADAS**

SCHUKO 230V 16A IP44		2
----------------------	--	---



The information is aligned with the Data file at the time of download. Printed on 13/02/2018 (ID 5559)

©2017 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice